

ideal lux[®]

Deva

Deva ^{new}


Linear system composed of an extruded aluminum profile and magnetic lighting fixtures. The system is available in coated or anodized matt black, ceiling or suspended installation (SURFACE), quick recessed plasterboard installation (RECESSED EASY) or edgeless recessed installation between two plasterboard panels (RECESSED). Small dimensions of the electrified profile, 10 mm wide and 15 mm high, available in the two lengths, 1000 mm and 2000 mm, or with a 90° horizontal curved connection. Possibility of composition with different light modules, in white or black finish depending on the desired arrangement, modifiable if necessary: fixed or adjustable TRACK modules for spot lighting; ACCENT modules for focused lighting; PENDANT TUBE module for focused lighting; WIDE INNER linear modules hidden inside the profile, WIDE OUTER linear modules showing outside the profile or DISC circular modules, for diffused and uniform lighting. Integrated LED technology with colour temperature of 3000 K with high color rendering CRI ≥ 90 , IP20 protection, insulation class III, 24 Vdc power supply, non-dimmable, LED useful life 30,000 h L70B50. Ideal for lighting small environments where minimal size, wide application flexibility and high lighting quality are required, for example RESIDENTIAL, MUSEUM and RETAIL spaces.

Source	LED COB / SMD
Driver included	No
Drivers available	On/Off
MacAdam	SDCM 3
CCT	3000 K
CRI	≥ 90
LED life	30.000h
Insulation class	III
IP	20
Material	Aluminum
Warranty	5 years






Deva Track

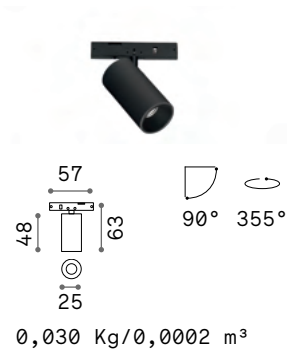

0,030 Kg/0,0002 m³

LED COB OSRAM


Power	Beam	Control	Lumen	CCT	Finish		Code	€
2,5 W	37°	On-Off	150 lm	3000 K	White		332772	35 new
					Black		332765	35 new

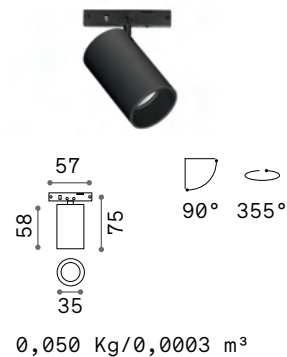

0,050 Kg/0,0003 m³

LED COB BRIDGELUX

Power	Beam	Control	Lumen	CCT	Finish		Code	€
4,5 W	34°	On-Off	450 lm	3000 K	White		332796	40 new
					Black		332789	40 new

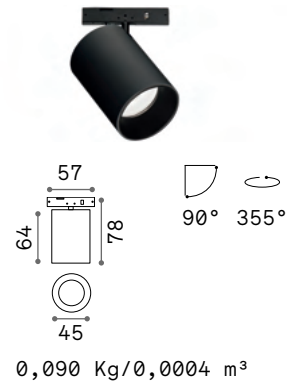

0,090 Kg/0,0004 m³

LED COB BRIDGELUX


Power	Beam	Control	Lumen	CCT	Finish		Code	€
8 W	30°	On-Off	750 lm	3000 K	White		332826	45 new
					Black		332819	45 new




Light beam: ACCENT



LENS



m	lx	øm
1	913	0,51
2	228	1,00
3	101	1,50
4	57	2,10
5	37	2,60



CRI≥90 4,5W 38° 450lm 3000K

Required	Beam	Model	Code	€
No	15°	TRACK 2,5W	332543	5 new
		TRACK 4,5W	332505	5 new
		TRACK 8W	332468	5 new




Deva Disc




LED COB BRIDGELUX

Power	Beam	Control	Lumen	CCT	Finish		Code	€
5 W	38°	On-Off	500 lm	3000 K	White		332857	40 new
					Black		332840	40 new

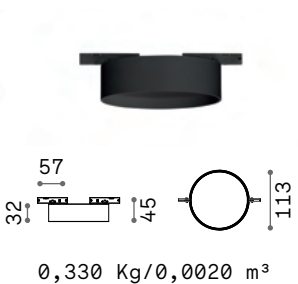

LED SMD

Power	Beam	Control	Lumen	CCT	Finish		Code	€
10 W	98°	On-Off	1100 lm	3000 K	White		332888	45 new
					Black		332864	45 new

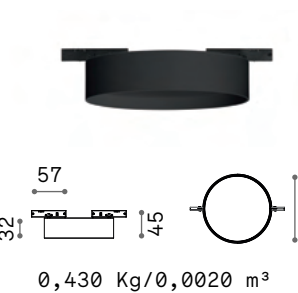


LED SMD


Power	Beam	Control	Lumen	CCT	Finish		Code	€
15 W	98°	On-Off	1750 lm	3000 K	White		332918	55 new
					Black		332901	55 new



Light beam: ACCENT




m	lx	øm
1	764	0,68
2	191	1,40
3	85	2,00
4	48	2,70
5	31	3,40




CRI≥90 5W 38° 500lm 3000K



Light beam: WIDE



m	lx	øm
1	309	3,30
2	77	6,60
3	34	9,80
4	19	13,00
5	12	16,00



CRI≥90 15W 98° 1750lm 3000K



332840



332901




Deva Accent



LED SMD

Power	Beam	Control	Lumen	CCT	Finish		Code	€
5 W	34°	On-Off	350 lm	3000 K	Black	■	332758	30 <small>new</small>

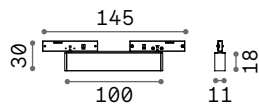


0,070 Kg/0,0002 m³



LED SMD OSRAM

Power	Beam	Control	Lumen	CCT	Finish		Code	€
10 W	34°	On-Off	900 lm	3000 K	Black	■	332734	40 <small>new</small>

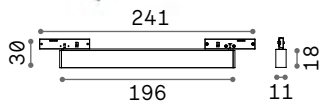


0,140 Kg/0,0003 m³



LED SMD OSRAM


Power	Beam	Control	Lumen	CCT	Finish		Code	€
14 W	34°	On-Off	1400 lm	3000 K	Black	■	332710	50 <small>new</small>

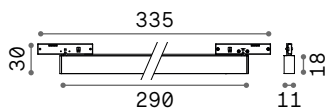


0,230 Kg/0,0005 m³




Light beam: **ACCENT**




m	lx	øm
1	913	0,51
2	228	1,00
3	101	1,50
4	57	2,10
5	37	2,60



CRI≥90 5W 34° 350lm 3000K



m	lx	øm
1	2698	0,51
2	675	1,00
3	300	1,50
4	169	2,10
5	108	2,60



CRI≥90 14W 34° 1400lm 3000K



Deva Accent 145 mm




Deva Accent 241 mm



Deva Accent 335 mm




Deva Wide Inner

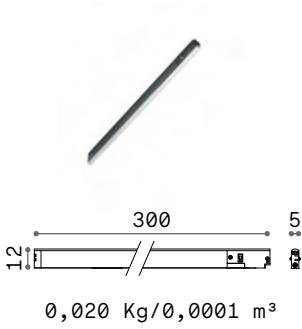


LED SMD

Power	Beam	Control	Lumen	CCT	Finish		Code	€
6 W	100°	On-Off	700 lm	3000 K	Black		332949	25 <small>new</small>

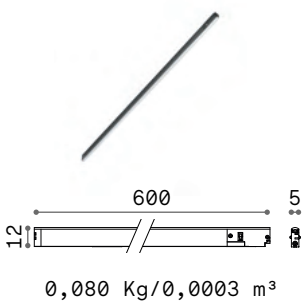

LED SMD

Power	Beam	Control	Lumen	CCT	Finish		Code	€
11 W	100°	On-Off	1400 lm	3000 K	Black		332925	35 <small>new</small>

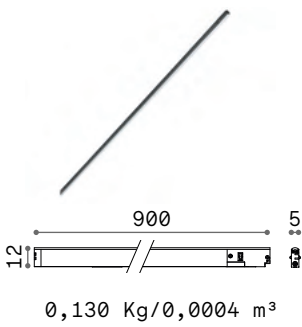


LED SMD


Power	Beam	Control	Lumen	CCT	Finish		Code	€
16 W	100°	On-Off	2100 lm	3000 K	Black		332895	50 <small>new</small>




Light beam: WIDE



m	lx	ø m
1	161	6,0
2	40	12
3	18	18
4	10	24
5	6,4	30



CRI≥90 11W 100° 1400lm 3000K

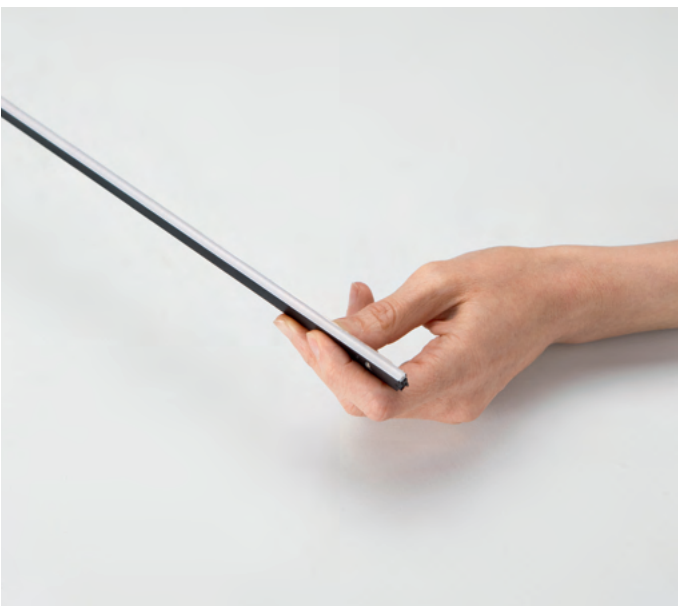

Deva Wide Inner 300 mm



Deva Wide Inner 600 mm



Deva Wide Inner 900 mm




Deva Wide Outer




LED SMD

Power	Beam	Control	Lumen	CCT	Finish		Code	€
8 W	100°	On-Off	900 lm	3000 K	Black	■	332871	25 <small>new</small>

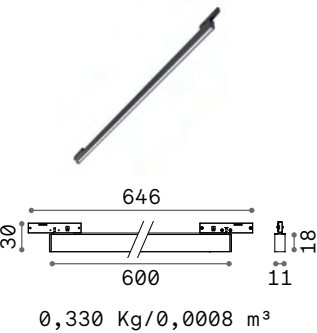

LED SMD

Power	Beam	Control	Lumen	CCT	Finish		Code	€
12 W	100°	On-Off	1350 lm	3000 K	Black	■	332833	35 <small>new</small>

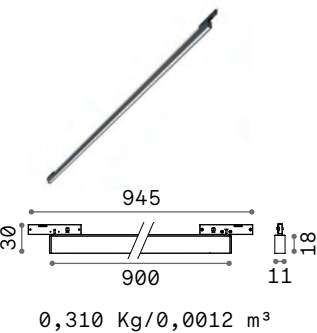


LED SMD

Power	Beam	Control	Lumen	CCT	Finish		Code	€
21 W	100°	On-Off	2700 lm	3000 K	Black	■	332802	50 <small>new</small>



Light beam: WIDE



m	lx	øm
1	257	1,90
2	64	3,70
3	29	5,60
4	16	7,50
5	10	9,40



CRI≥90 12W 100° 1350lm 3000K



Deva Wide Outer 346 mm




Deva Wide Outer 646 mm




Deva Wide Outer 945 mm



Deva Pendant

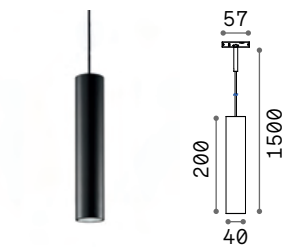


LED COB BRIDGELUX

Power	Beam	Control	Lumen	CCT	Finish		Code	€
6 W	34°	On-Off	550 lm	3000 K	Black		332932	45 <small>new</small>


0,280 Kg/0,0009 m³



Light beam: **ACCENT**



m	lx	Øm
1	742	0,68
2	186	1,40
3	82	2,00
4	46	2,70
5	30	3,40



CRI≥90 6W 34° 550lm 3000K




Deva Surface




PROFILE SURFACE No mounting kit required, direct ceiling installation
Maximum length per power source: 10 meters

Length	Weight	Volume	Finish		Code	€
1000 mm	0,280 Kg	0,0003 m³	Black	■	332475	20 new
2000 mm	0,470 Kg	0,0007 m³	Black	■	332482	40 new




SURFACE CORNER ROUND Optional

Weight	Volume	Control	Finish		Code	€
0,056 Kg	0,0014 m³	On-Off	Black	■	339375	91 new




SURFACE CORNER L Optional

Weight	Volume	Control	Finish		Code	€
0,020 Kg	0,0002 m³	On-Off	Black	■	339382	41 new



LINEAR CONNECTOR Required - 1 Kit x linear connection

Weight	Volume	Control	Finish		Code	€
0,009 Kg	0,0001 m³	On-Off	Black	■	339368	18 new



MAIN CONNECTOR Required - 1 Kit x power source max 140W

Weight	Volume	Control	Finish		Code	€
0,001 Kg	0,0002 m³	On-Off	Black	■	332581	15 new

Cable length 1500 mm

DRIVER ON/OFF Required



Power	Output	Class	Measure (LxHxW)	Code	€
75 W	24 Vdc	□	168x30x38 mm	332659	65 new
150 W	24 Vdc	□	227x30x38 mm	332628	95 new




END CAP (2pcs. incl.)


KIT PENDANT

Required	Measure (LxHxW)	Finish		Code	€
Yes	10 x 7 x 15 mm	Black	■	332635	3 new
Yes	8 x 7 x 2050 mm	Black	■	332703	15 new

Deva - Assembly plans

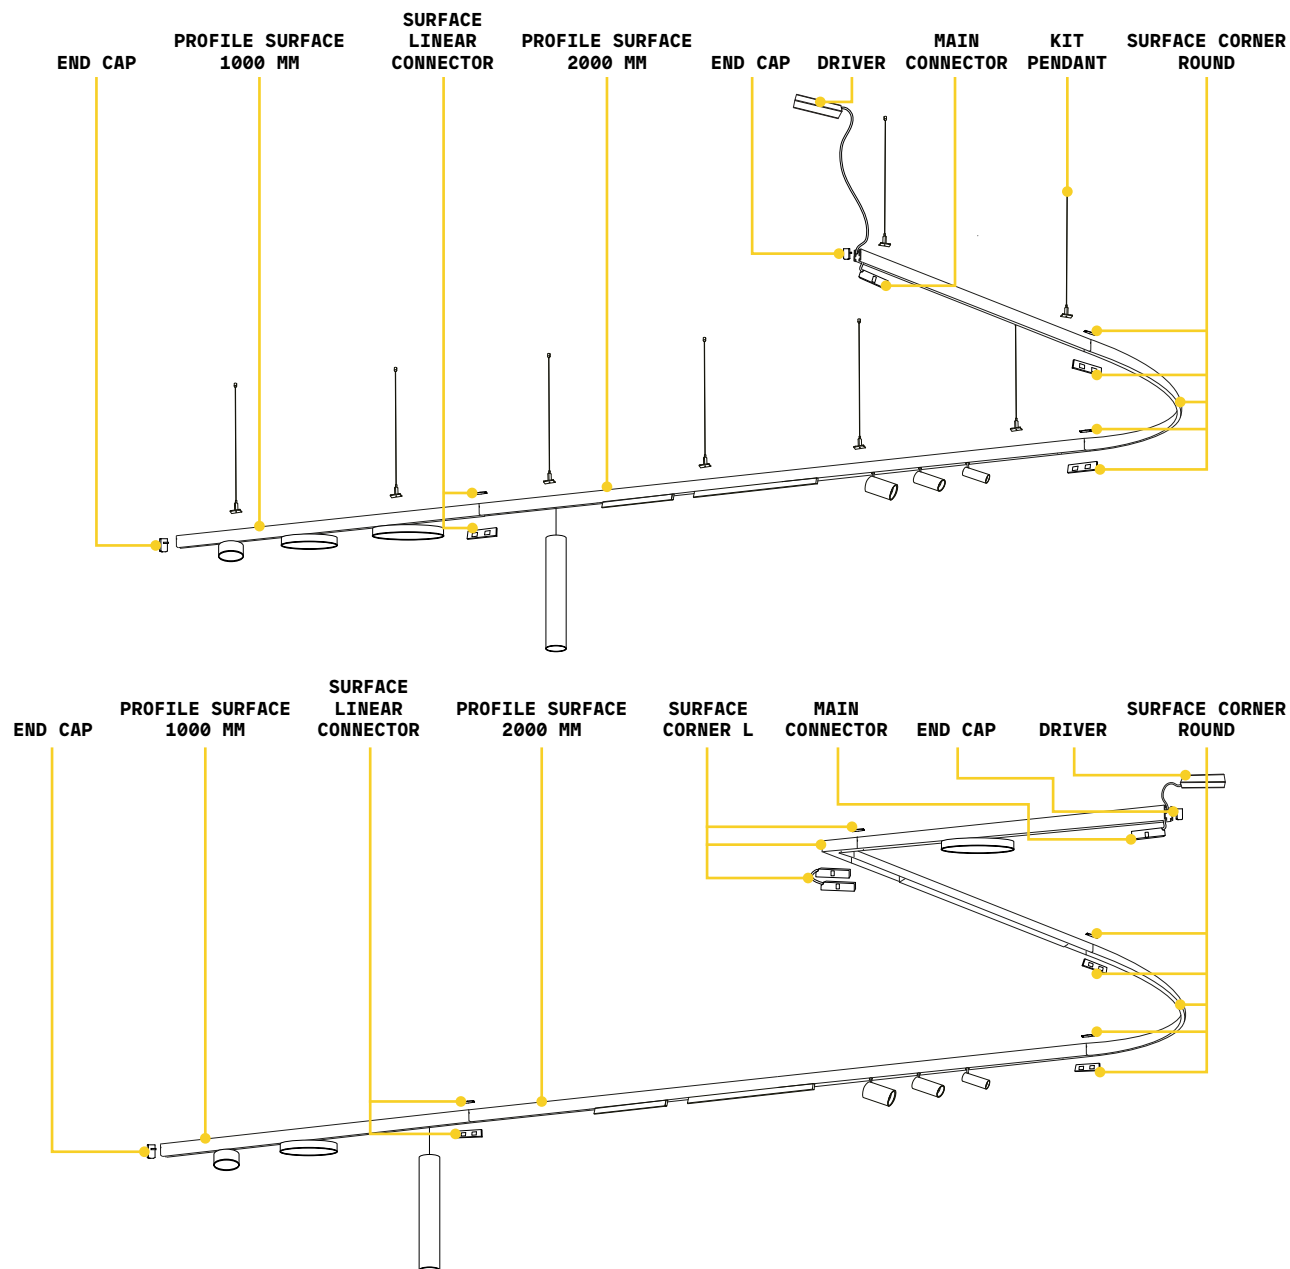


Deva - Recessed





PROFILE RECESSED No mounting kit required, direct ceiling installation
Maximum length per power source: 10 meters

Length	Weight	Volume	Finish		Code	€
1000 mm	0,370 Kg	0,0017 m³	Black		332529	20 new
2000 mm	0,670 Kg	0,0034 m³	Black		332536	40 new




RECESSED CORNER ROUND Optional

Weight	Volume	Control	Finish		Code	€
0,267 Kg	0,0023 m³	On-Off	Black		339405	91 new




RECESSED CORNER L Optional

Weight	Volume	Control	Finish		Code	€
0,030 Kg	0,0003 m³	On-Off	Black		339412	41 new



RECESSED LINEAR CONNECTOR Required - 1 Kit x linear connection

Weight	Volume	Control	Finish		Code	€
0,020 Kg	0,0001 m³	On-Off	Black		339399	18 new



MAIN CONNECTOR Required - 1 Kit x power source max 140W

Weight	Volume	Control	Finish		Code	€
0,060 Kg	0,0002 m³	On-Off	Black		332581	15 new

Cable length 1500 mm

DRIVER ON/OFF Required





Power	Output	Class	Measure(LxHxW)	Code	€
75 W	24 Vdc		168x30x38 mm	332659	65 new
150 W	24 Vdc		227x30x38 mm	332628	95 new




END CAP (2pcs. incl.)

Required	Measure (L x H x W)	Finish		Code	€
Yes	10 x 7 x 15 mm	Black		332635	3

Deva - Assembly plans

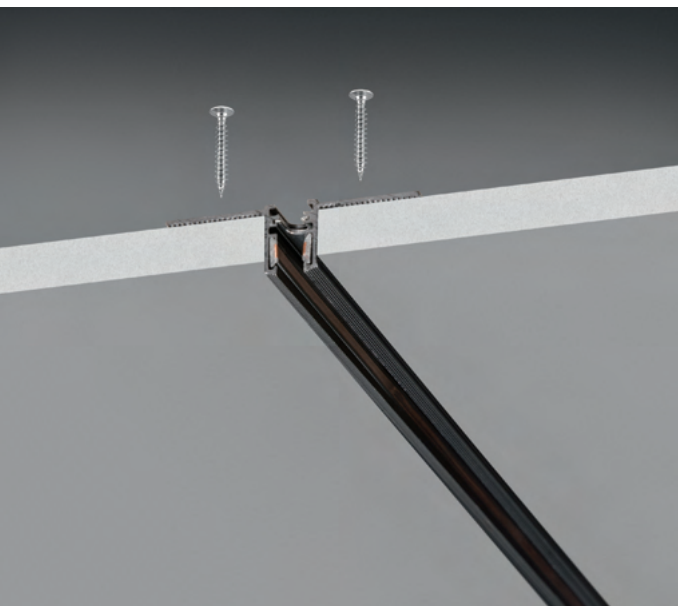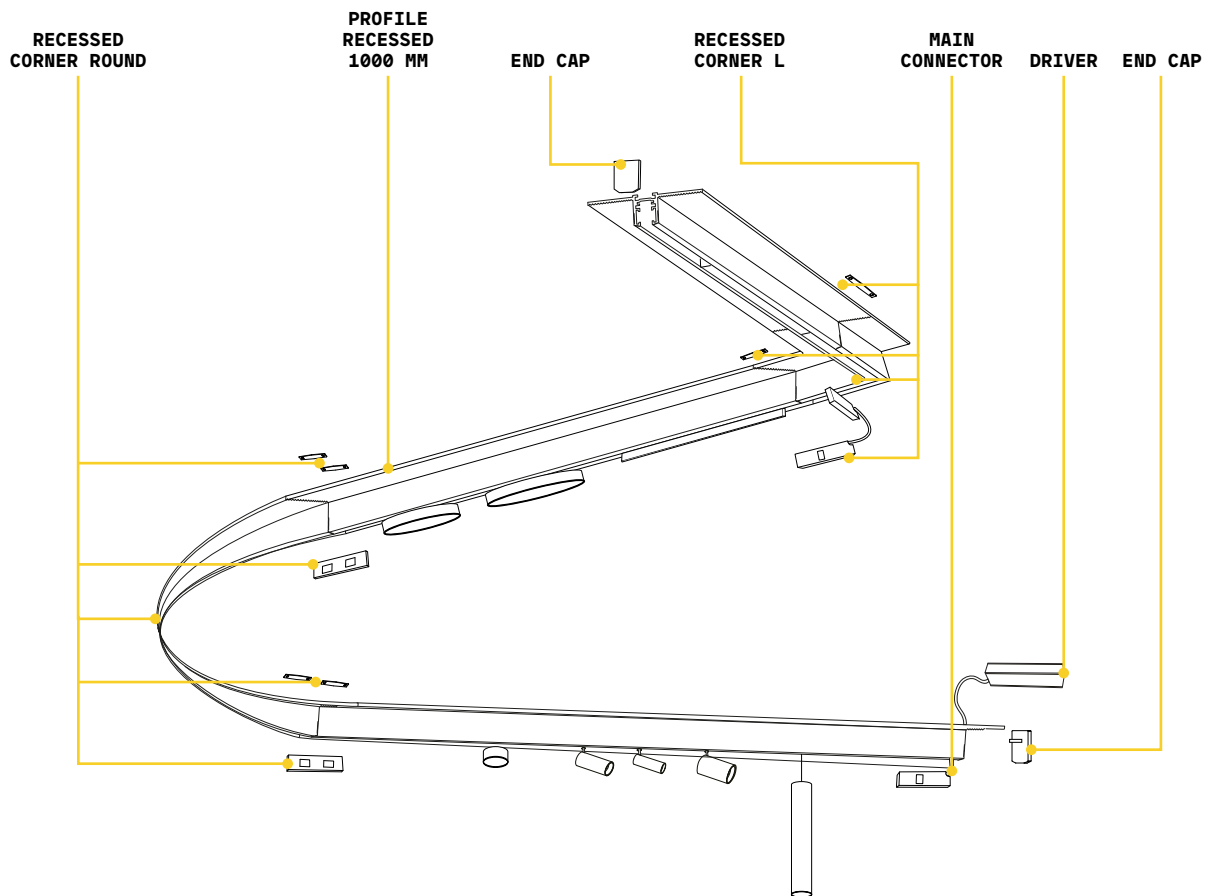

Deva - Recessed Easy





PROFILE

RECESSED EASY

No mounting kit required, direct ceiling installation

Maximum length per power source: 10 meters


Length	Weight	Volume	Finish		Code	€
1000 mm	0,370 Kg	0,0017 m³	Black	■	332499	25 new
2000 mm	0,870 Kg	0,0034 m³	Black	■	332512	50 new



RECESSED EASY CORNER L

Optional

Weight	Volume	Control	Finish		Code	€
0,030 Kg	0,0004 m³	On-Off	Black	■	339429	41 new




RECESSED

LINEAR CONNECTOR

Required - 1 Kit x linear connection

Weight	Volume	Control	Finish		Code	€
0,020 Kg	0,0001 m³	On-Off	Black	■	339399	18 new



MAIN CONNECTOR

Required - 1 Kit x power source max 140W

Weight	Volume	Control	Finish		Code	€
0,060 Kg	0,0002 m³	On-Off	Black	■	332581	15 new

Cable length 1500 mm

DRIVER ON/OFF

Required



Power	Output	Class	Measure (LxHxW)	Code	€
75 W	24 Vdc	□	168x30x38 mm	332659	65 new
150 W	24 Vdc	□	227x30x38 mm	332628	95 new



END CAP (2pcs. incl.)

Required	Measure (L x H x W)	Finish		Code	€
Yes	10x7x15 mm	Black	■	332635	3 new

Deva - Assembly plans

